SPECIFICATION
FOR
APPROVAL

(V) **Preliminary Specification**
( ) **Final Specification**

Title	14.1” XGA TFT LCD

BUYER	
MODEL	

SUPPLIER	LG.Philips LCD Co., Ltd.
*MODEL	LP141X13
Suffix	B1

*When you obtain standard approval,
please use the above model name without suffix

SIGNATURE	DATE
/	
/	
/	

Please return 1 copy for your confirmation with your signature and comments.

SIGNATURE	DATE
S.H. Kang / G.Manager	
REVIEWED BY	
J.H. Park / Manager	
/ Manager	
PREPARED BY	
C.J. Jun / Engineer	
/ Engineer	

Products Engineering Dept.
LG. Philips LCD Co., Ltd

Contents

No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	
3-1	ELECTRICAL CHARACTREISTICS	6
3-2	INTERFACE CONNECTIONS	7
3-3	SIGNAL TIMING SPECIFICATIONS	9
3-4	SIGNAL TIMING WAVEFORMS	9
3-5	COLOR INPUT DATA REFERNECE	10
3-6	POWER SEQUENCE	11
4	OPTICAL SFECIFICATIONS	12
5	MECHANICAL CHARACTERISTICS	16
6	RELIABLITY	20
7	INTERNATIONAL STANDARDS	
7-1	SAFETY	21
7-2	EMC	21
8	PACKING	
8-1	DESIGNATION OF LOT MARK	22
8-2	PACKING FORM	22
9	PRECAUTIONS	23
A	APPENDIX. Enhanced Extended Display Identification Data	25
B	APPENDIX. Inspection Criteria	28

RECORD OF REVISIONS

Revision No	Revision Date	Page	Description	Note
0.0	FEB.20.2002	-	First Draft	

1. General Description

The LP141X13(B1) is a Color Active Matrix Liquid Crystal Display with an integral Cold Cathode Fluorescent Lamp (CCFL) backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 14.1 inches diagonally measured active display area with XGA resolution(768 vertical by 1024 horizontal pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors.

The LP141X13(B1) has been designed to apply the interface method that enables low power, high speed, low EMI.

The LP141X13(B1) is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP141X13(B1) characteristics provide an excellent flat display for office automation products such as Notebook PC.

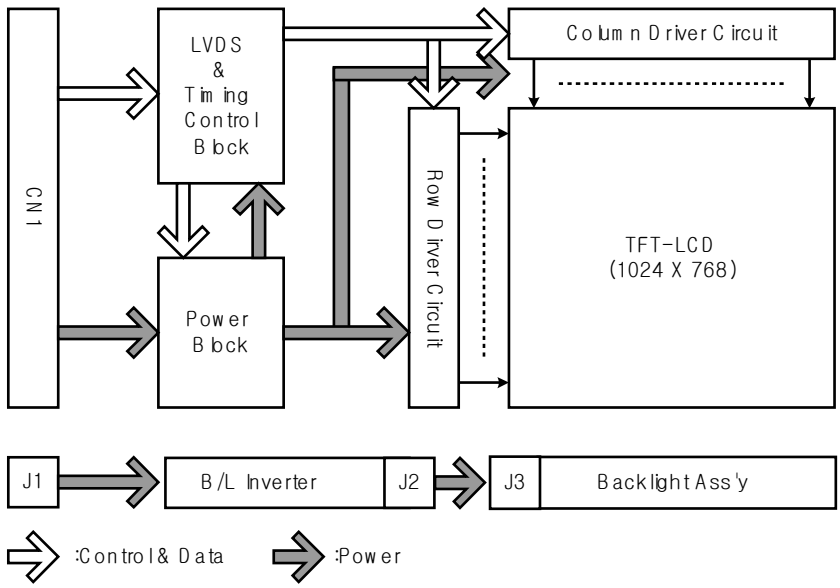

General Features

Active Screen Size	14.1 inches(35.814cm) diagonal
Outline Dimension	299(H) × 226.5(V) × 5.5(D) mm (Typ.)
Pixel Pitch	0.279 mm × 0.279 mm
Pixel Format	1024 horiz. By 768 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Luminance, White	150 cd/m^2(Min.), 5p average
Power Consumption	Total 5.0 Watt(Typ.)
Weight	435 g (Max.) w/o inverter and bracket, 450g(Max.) w/ inverter and bracket
Display Operating Mode	Transmissive mode, normally white
Surface Treatment	Hard coating(3H) Anti-glare treatment of the front polarizer

2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 1. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at 25 ± 5°C
Operating Temperature	TOP	0	50	°C	1
Storage Temperature	HST	-20	60	°C	1
Operating Ambient Humidity	HOP	10	90	%RH	1
Storage Humidity	HST	10	90	%RH	1

Note : 1. Temperature and relative humidity range are shown in the figure below.
Wet bulb temperature should be 39°C Max, and no condensation of water.

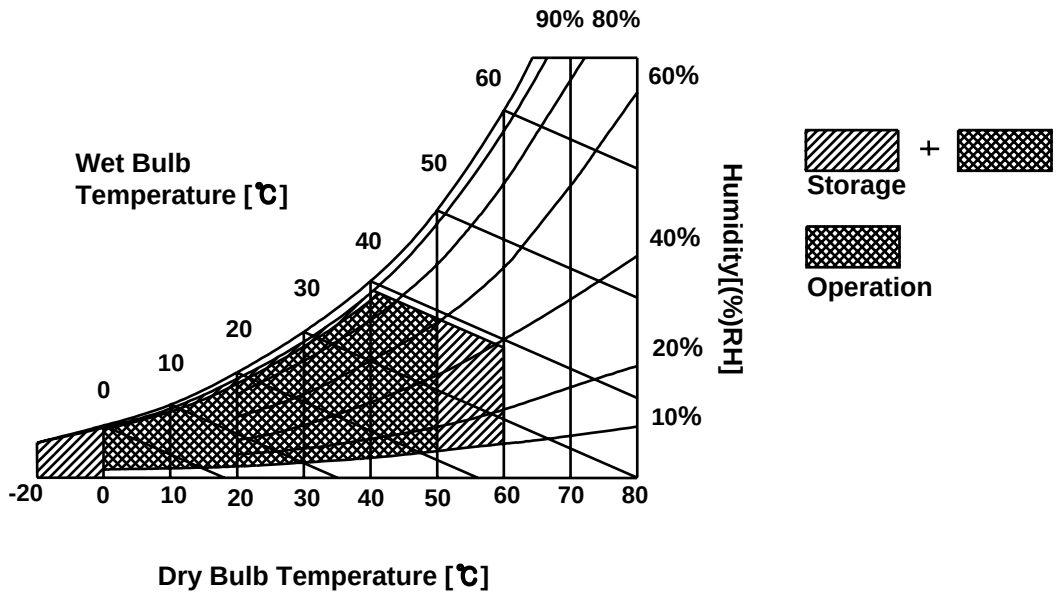

3. Electrical Specifications

3-1. Electrical Characteristics

The LP141X13(B1) requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input which powers the CCFL, is typically generated by an inverter. The inverter is an external unit to the LCD.

Table 2. ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
MODULE :						
Power Supply Input Voltage	VCC	3.0	3.3	3.6	V_{DC}	
Power Supply Input Current	I_{CC}	-	365	515	mA	1
Power Consumption	Pc	-	1.2	1.7	Watt	1
Differential Impedance	Zm	90	100	110	Ohm	2
LAMP :						
Operating Voltage	V_{BL}	615(6.5mA)	630(6mA)	795(3.0mA)	V_{RMS}	
Operating Current	I_{BL}	3.0	6.0	6.5	mA_{RMS}	3
Operating Frequency	f_{BL}	50	65	80	kHz	
Discharge Stabilization Time	Ts	-	-	3	Min	4
Life Time		10,000	-	-	Hrs	5
INVERTER :						
Input Voltage	V_{IN}	9.0	14.4	21.0	V_{DC}	
Input Current	I_{IN}	-	340	390	mA	6
Input Power Consumption	P_{IN}	4.17	4.90	5.62	W	6
Backlight On/Off Control	FPVEE_High	2.0	-	5.25	V_{DC}	
	FPVEE_Low	-0.3	-	0.8	V_{DC}	
Backlight Adjust (I_{BL} Control)		FF_H	-	00_H	-	
Output Voltage	V_{OUT}	580	680	780	V_{RMS}	6
Output Current (Aging 30minutes)	I_{OUT}_FF	-	2.0	2.3	mA_{RMS}	7
	I_{OUT}_00	5.5	6.0	6.5	mA_{RMS}	7
Operating Frequency	Freq.	45	60	75	KHz	7
Output Power Consumption	P_{OUT}	3.98	4.1	4.68	W	6
Open Lamp Voltage	V_{OPEN}	1450	-	-	V_{RMS}	8
Efficiency	η	75	-	-	%	9
Striking Time	T_S	0.6	1.0	1.4	sec	10

Note)

1. The specified current and power consumption are under the Vcc = 3.3V , 25℃, fv = 60Hz condition whereas full black pattern is displayed and fv is the frame frequency.
2. This impedance value is needed to proper display and measured form LVDS Tx to the mating connector.
3. The typical operating current is for the typical surface luminance (L_{WH}) in optical characteristics.

Note)

4. Define the brightness of the lamp after being lighted for 5 minutes as 100%, Ts is the time required for the brightness of the center of the lamp to be not less than 95%.
5. The life time is determined as the time at which brightness of lamp is 50% compare to that of initial value at the typical lamp current.
6. V_{IN} = 14.4V, I_{OUT} = 6.0mA.
7. V_{IN} = 9 ~ 21V.
8. No Load, V_{IN} = 9V.
9. V_{IN} =9V, 00_H.
10. No Load, V_{IN} = 9 ~ 21V, 00_H

3-2. Interface Connections

This LCD employs two interface connections, a 30 pin connector is used for the module electronics interface and the other connector is used for the integral backlight system.
The electronics interface connector is a model FI-XB30SR-HF11 manufactured by JAE.

Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Pin	Symbol	Description	Notes
1	GND	Ground	
2	VCC	Power Supply, 3.3V Typ.	
3	VCC	Power Supply, 3.3V Typ.	
4	V EEDID	DDC 3.3V power	
5	NC	Reserved for supplier test point	
6	Clk EEDID	DDC Clock	
7	DATA EEDID	DDC Data	
8	R_{IN} 0-	Negative LVDS differential data input	
9	R_{IN} 0+	Positive LVDS differential data input	
10	GND	Ground	
11	R_{IN} 1-	Negative LVDS differential data input	
12	R_{IN} 1+	Positive LVDS differential data input	
13	GND	Ground	
14	R_{IN} 2-	Negative LVDS differential data input	
15	R_{IN} 2+	Positive LVDS differential data input	
16	GND	Ground	
17	CLKIN-	Negative LVDS differential clock input	
18	CLKIN+	Positive LVDS differential clock input	
19	GND	Ground	
20	NC	No connect	
21~30	NC	No connect	

1, Interface chips
1.1 LCD : LPZE102S6L(LCD Controller) including LVDS Receiver
1.2 System : THC63LVDF823A or equivalent
* Pin to Pin compatible with TI LVDS

2. Connector
2.1 LCD : FI-XB30SRL-HF11, JAE
2.2 Mating : FI-X30M or equivalent.
2.3 Conncetor pin arrangement



[LCD Module Rear View]

The inverter interface connector(J1) is a LVC-D20SFYG model manufactured by Honda. The pin configuration for the connector is shown in the table below.

Table 4. BACKLIGHT INVERTER CONNECTOR PIN CONFIGURATION (J1)

Pin	Symbol	Description	Notes
1	V_{IN}	Power for the inverter	[Connector] LVC-D20SFYG, Honda [Connector pin arrangement] 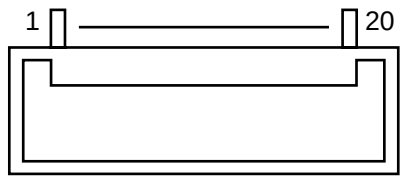
2	V_{IN}	Power for the inverter	
3	V_{IN}	Power for the inverter	
4	NC	No connection	
5	GND	Ground	
6	5V_SUS	Power for the control circuit	
7	5V_ALW	Power for storing a brightness values	
8	GND	Ground	
9	SMB_DAT	Brightness data	
10	SMB_CLK	Clock for brightness data	
11	GND	Ground	
12	FPVEE	Enable for lamp turn on and off	
13	GND	Ground	
14~16	NC	No connection	
17	PANEL_ID3	1(OPEN)	
18	PANEL_ID2	1(OPEN)	
19	PANEL_ID1	1(OPEN)	
20	PANEL_ID0	1(OPEN)	

The backlight interface connector is a model BHSR-02VS-1, manufactured by JST. The mating connector part number is SM02B-BHSS-1 or equivalent.

Table 5. BACKLIGHT CONNECTOR PIN CONFIGURATION (J3)

Pin	Symbol	Description	Notes
1	HV	Power supply for lamp (High voltage side)	1
2	LV	Power supply for lamp (Low voltage side)	1

Notes : 1. The high voltage side terminal is colored pink and the low voltage side terminal is white

3-3. Signal Timing Specifications

This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for it's proper operation.

Table 6. TIMING TABLE

ITEM	Symbol		Min	Typ	Max	Unit	Note
DCLK	Frequency	f_{CLK}	65	65	65	MHz	15.4ns
Hsync	Period	t_{HP}	1206	1344	1364	t_{CLK}	
	Width	t_{WH}	8	136	240		
Vsync	Period	t_{VP}	780	806	830	t_{HP}	
	Width	t_{WV}	2	-	-		
Data Enable	Horizontal back porch	t_{HBP}	16	-	-	t_{CLK}	
	Horizontal front porch	t_{HFP}	16	-	-		
	Vertical back porch	t_{VBP}	3	-	-	t_{HP}	
	Vertical front porch	t_{VFP}	2	-	-		

3-4. Signal Timing Waveforms

Condition : VCC =3.3V

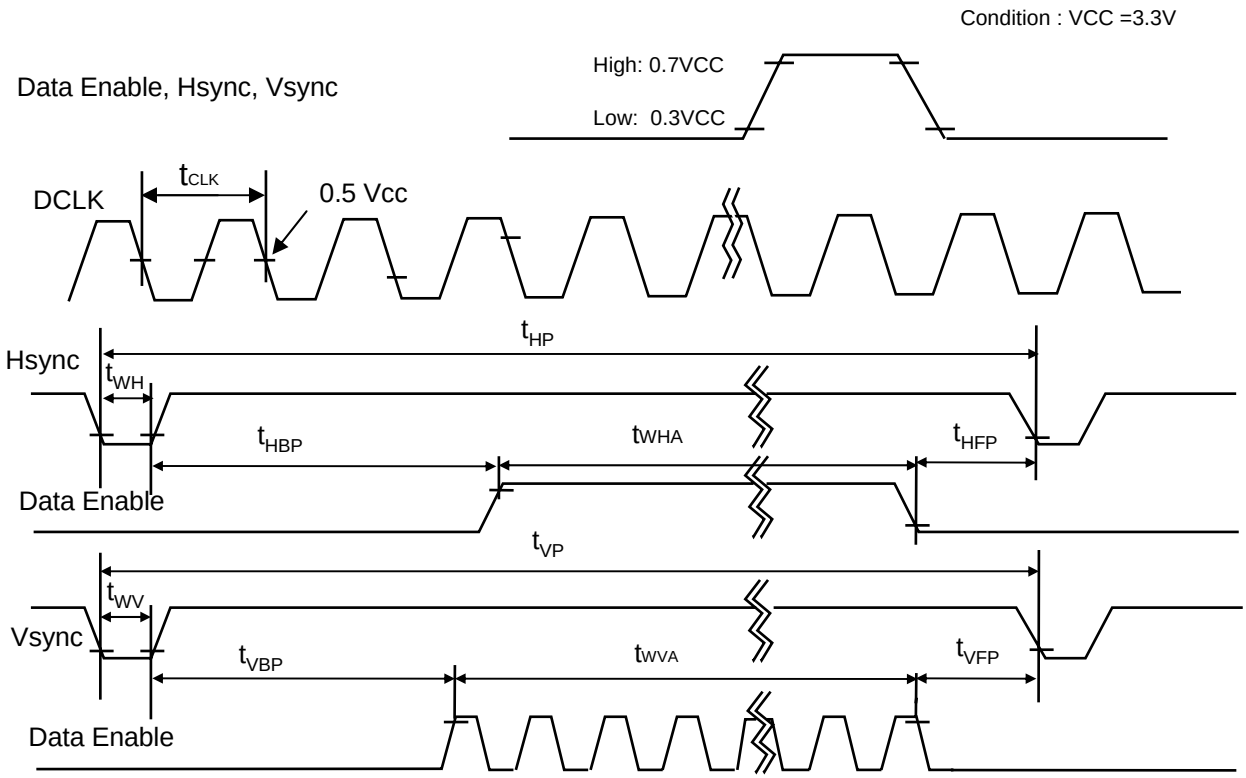

3-5. Color Input Data Reference

The brightness of each primary color (red,green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

Table 7. COLOR DATA REFERENCE

Color		Input Color Data																	
		RED						GREEN						BLUE					
		MSB					LSB	MSB					LSB	MSB					LSB
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	…	…						…						…					
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	...	...						...						...					
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
BLUE	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	…	…						…						…					
	BLUE (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

3-6. Power Sequence

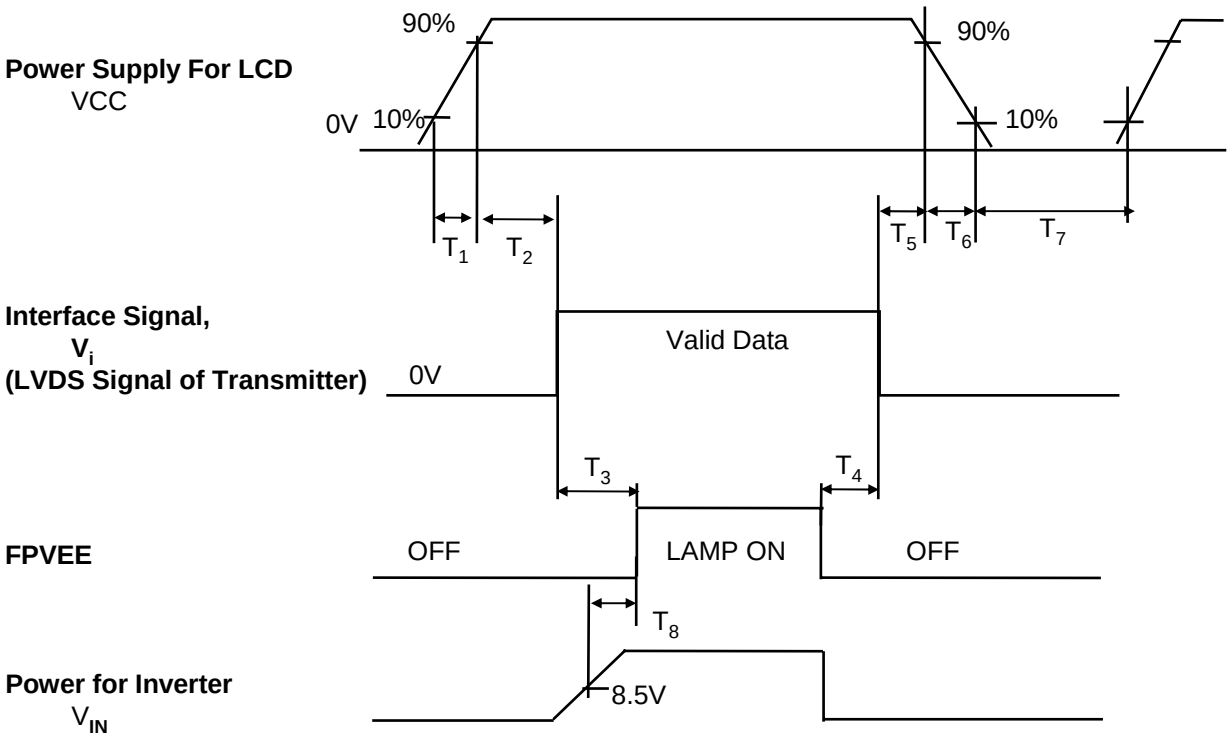

Table 8. POWER SEQUENCE TABLE

Parameter	Value			Units
	Min.	Typ.	Max.	
T_1	-	-	10	(ms)
T_2	0	-	50	(ms)
T_3	200	-	-	(ms)
T_4	0	-	-	(ms)
T_5	0	-	50	(ms)
T_6	0	-	100	(ms)
T_7	400	-	-	(ms)
T_8	10	-	-	(ms)

Note)
1. Please avoid floating state of interface signal at invalid period.
2. When the interface signal is invalid, be sure to pull down the power supply for LCD VCC to 0V.
3. Lamp power must be turn on after power supply for LCD and interface signal are valid.

4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of Φ and Θ equal to 0°.
FIG. 1 presents additional information concerning the measurement equipment and method.

FIG. 1 Optical Characteristic Measurement Equipment and Method

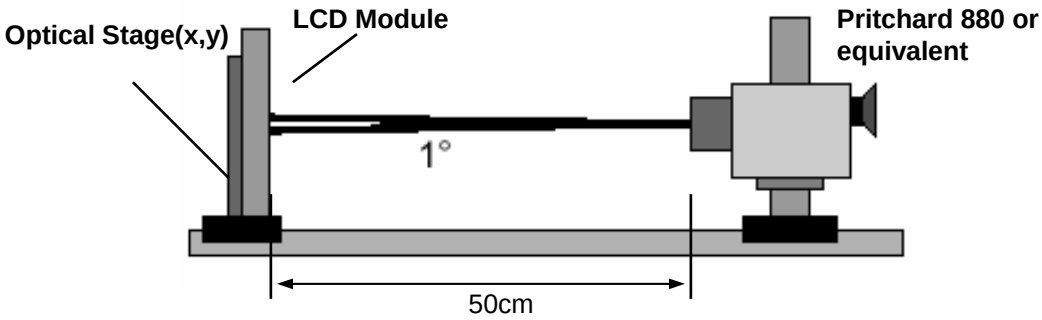

Table 9. OPTICAL CHARACTERISTICS

Ta=25°C, VCC=3.3V, fv=60Hz, f_{CLK}= 65MHz, Iout = 6.0mA(SMB-DAT=00H)

Parameter		Symbol	Values			Units	Notes
			Min	Typ	MAx		
Contrast Ratio		CR	250	300	-		1
Surface Luminance, white		L_{WH}	150	-	-	cd/m^2	2
Luminance Variation		δ_{WHITE}	-	-	35	%	3
Response Time							4
	Rise Time	Tr_R	-	15	30	ms	
	Decay Time	Tr_D	-	30	50	ms	
Color Coordinates							
	RED	RX	0.558	0.588	0.618		
		RY	0.306	0.336	0.366		
	GREEN	GX	0.289	0.319	0.349		
		GY	0.517	0.547	0.577		
	BLUE	BX	0.120	0.150	0.180		
		BY	0.102	0.132	0.162		
	WHITE	WX	0.290	0.320	0.350		
		WY	0.300	0.330	0.360		
Viewing Angle							5
	x axis, right(Φ=0°)	Θr	40	-	-	degree	
	x axis, left (Φ=180°)	Θl	40	-	-	degree	
	y axis, up (Φ=90°)	Θu	10	-	-	degree	
	y axis, down (Φ=270°)	Θd	30	-	-	degree	
Gray Scale				2.2			6

Note)

1. Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

$$L_{WH} = \text{Average}(L_1, L_2, \ldots L_5)$$

3. The variation in surface luminance , The panel total variation (δ_{WHITE}) is determined by measuring L_N at each test position 1 through 13 and then defined as followed numerical formula. For more information see FIG 2.

$$\delta_{WHITE} = \frac{\text{Maximum}(L_1, L_2, \ldots L_{13}) - \text{Minimum}(L_1, L_2, \ldots L_{13})}{\text{Maximum}(L_1, L_2, \ldots L_{13})} \times 100$$

4. Response time is the time required for the display to transition from white to black (rise time, Tr_R) and from black to white(Decay Time, Tr_D). For additional information see FIG 3.

5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

6. Gray scale specification * f_V=60Hz

Gray Level	Luminance [%] (Typ)
L0	0.32
L7	0.75
L15	3.27
L23	8.98
L31	20.65
L39	35.65
L47	54.84
L55	76.9
L63	100

FIG. 2 Luminance

<measuring point for surface luminance & measuring point for luminance variation>

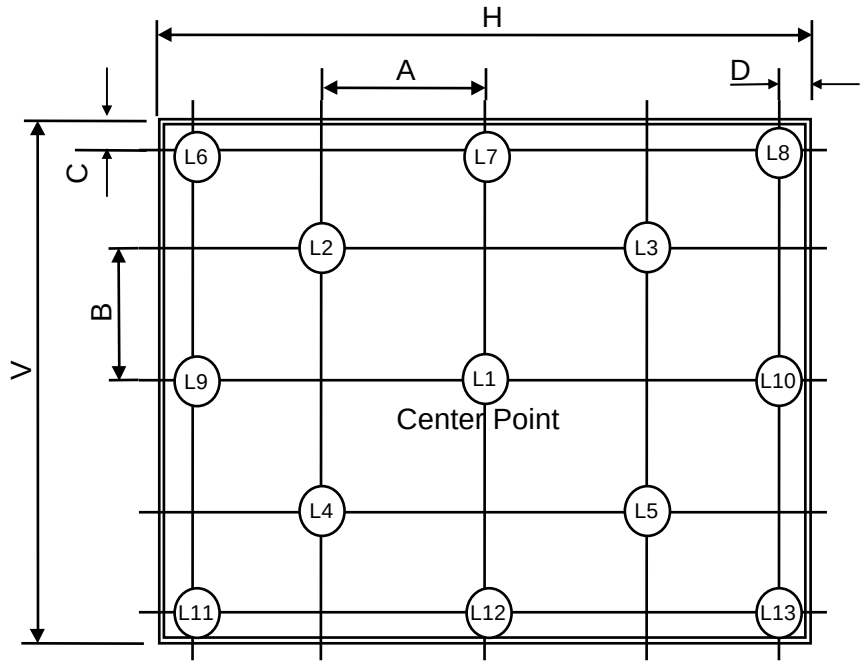

H,V : ACTIVE AREA
A : H/4 mm
B : V/4 mm
C : 10 mm
D : 10 mm
POINTS : 13 POINTS

FIG. 3 Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for “black” and “white”.

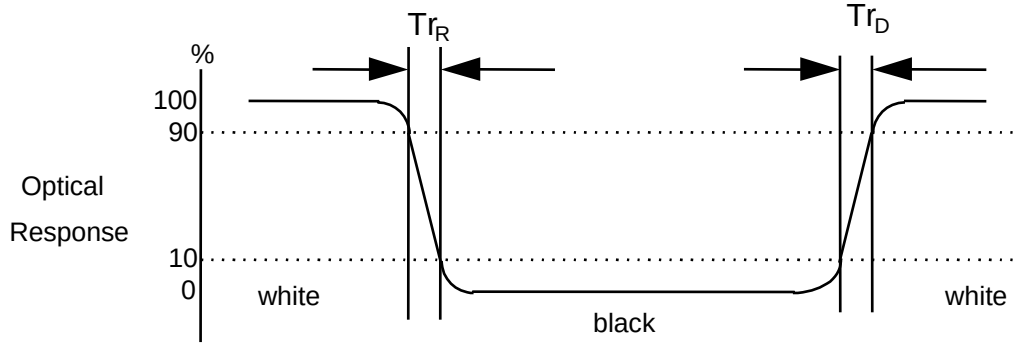

FIG. 4 Viewing angle

<Dimension of viewing angle range>

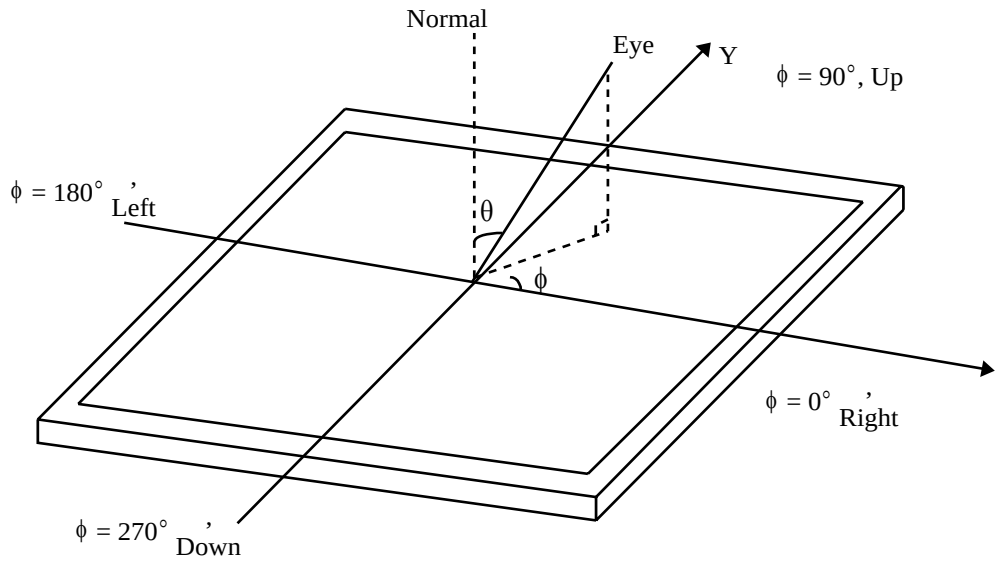

5. Mechanical Characteristics

The contents provide general mechanical characteristics for the model LP141X13(B1). In addition the figures in the next page are detailed mechanical drawing of the LCD.

Outline Dimension	Horizontal	299 ± 0.5mm
	Vertical	226.5 ± 0.5mm
	Depth	5.2 mm(Typ.) 5.5mm(Max.)
Bezel Area	Horizontal	289 ± 0.5mm
	Vertical	217.5 ± 0.5mm
Active Display Area	Horizontal	285.696 mm
	Vertical	214.272 mm
Weight	435g (Max.) without inverter & bracket 450g (Max.) with inverter & bracket	
Surface Treatment	Hard coating(3H) Anti-glare treatment of the front polarizer	

<FRONT VIEW>

Note) Unit:[mm], General tolerance: ± 0.5mm

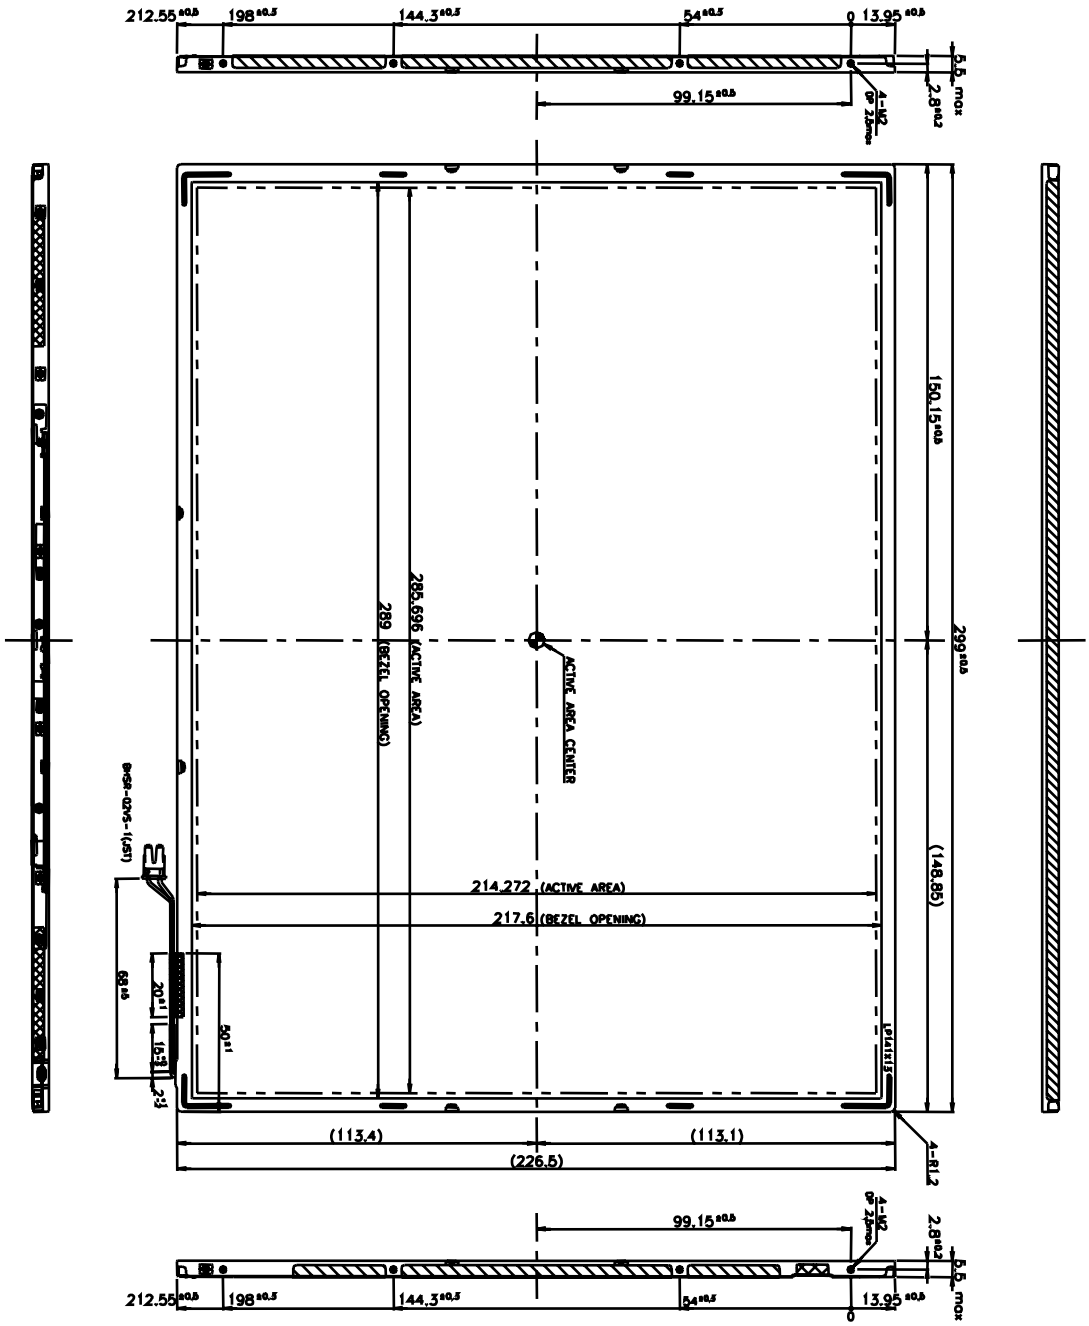

<REAR VIEW>

Note) Unit:[mm], General tolerance: ± 0.5mm

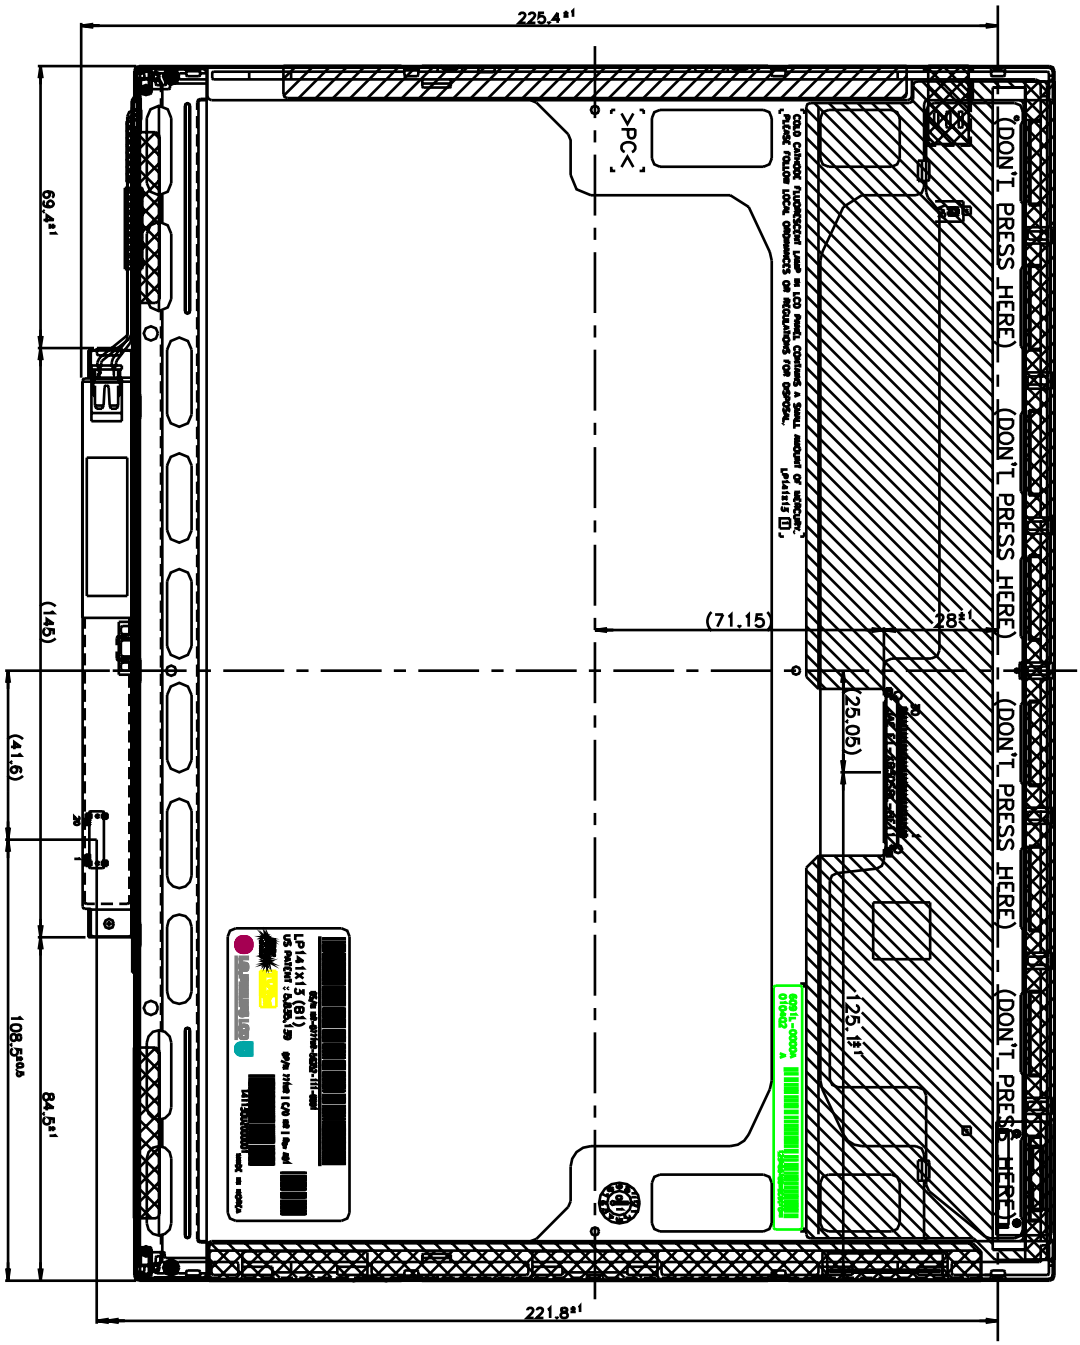

[DETAIL DESCRIPTION OF SIDE MOUNTING SCREW]

* Screw Length : Left and Right (Max: 2.3, Min 1.8)
* Screw Torque : Max 2.5kgf cm

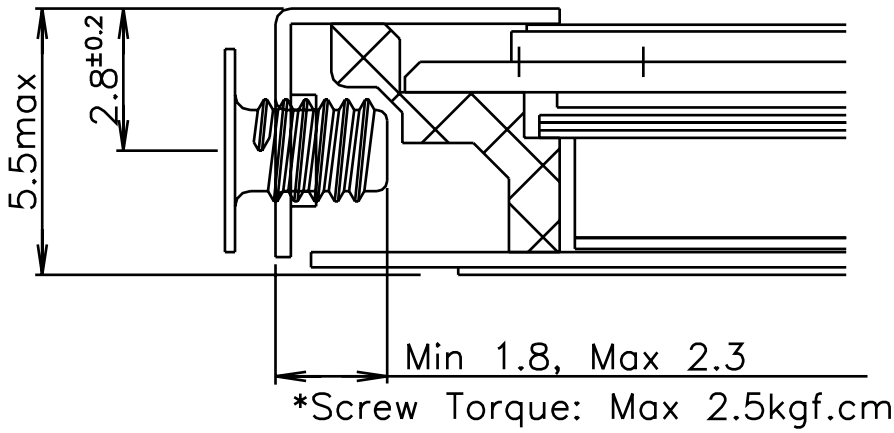

Note) Unit:[mm], General tolerance: ± 0.5mm

6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Vibration test (non-operating)	Sine wave, 10 ~ 500 ~ 10Hz, 1.5G, 0.37oct/min 3 axis, 1hour/axis
6	Shock test (non-operating)	Half sine wave, 180G, 2ms one shock of each six faces(I.e. run 180G 6ms for all six faces)
7	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr

{ Result Evaluation Criteria }
There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

7. International Standards

7-1. Safety

a) UL 1950 Third Edition, Underwriters Laboratories, Inc. Jan. 28, 1995.
Standard for Safety of Information Technology Equipment Including Electrical Business Equipment.
b) CAN/CSA C22.2 No. 950-95 Third Edition, Canadian Standards Association, Jan. 28, 1995.
Standard for Safety of Information Technology Equipment Including Electrical Business Equipment.
c) EN 60950 : 1992+A1: 1993+A2: 1993+A3: 1995+A4: 1997+A11: 1997
IEC 950 : 1991+A1: 1992+A2: 1993+A3: 1995+A4: 1996
European Committee for Electrotechnical Standardization(CENELEC)
EUROPEAN STANDARD for Safety of Information Technology Equipment Including Electrical Business Equipment.

7-2. EMC

a) ANSI C63.4 “Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHZ to 40GHz. “American National Standards Institute(ANSI), 1992
b) C.I.S.P.R “Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment.“ International Special Committee on Radio Interference.
c) EN 55022 “Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment.“ European Committee for Electrotechnical Standardization.(CENELEC), 1998

8. Packing

8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M

A,B,C : SIZE
D : YEAR
E : MONTH
F,G : PANEL CODE
H : ASSEMBLY CODE
I,J,K,L,M : SERIAL NO.

Note

1. YEAR

Year	97	98	99	2000	2001	2002	2003	2004	2005	2006	2007
Mark	7	8	9	0	1	2	3	4	5	6	7

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	4	4	5	6	7	8	9	A	B	C

3. Serial No

Serial No.	1 ~ 99,999	100,000 ~
Mark	00001 ~ 99999	A0001 ~ A9999, - - - - , Z9999

b) Location of Lot Mark

Serial NO. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.

8-2. Packing Form

a) Package quantity in one box : 10 pcs

b) Box Size : 301mm × 278mm × 355mm

9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

9-1. MOUNTING PRECAUTIONS

(1) You must mount a module using holes arranged in four corners or four sides.
(2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
(3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
(4) You should adopt radiation structure to satisfy the temperature specification.
(5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
(6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.
Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)
(7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
(8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
(9) Do not open the case because inside circuits do not have sufficient strength.

9-2. OPERATING PRECAUTIONS

(1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
V=± 200mV(Over and under shoot voltage)

(2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
(3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)
And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
(4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
(5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
(6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.

9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

(1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
(2) The polarizer surface should not come in contact with any other object.
It is recommended that they be stored in the container in which they were shipped.

9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

(1) The protection film is attached to the bezel with a small masking tape.
When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
(2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
(3) You can remove the glue easily. When the glue remains on the bezel surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3

Byte# DEC	Byte# HEX	Field Name and Comments	Value HEX		Value BIN	
0	00	Header	0	0	00000000	**Header**
1	01		F	F	11111111	
2	02		F	F	11111111	
3	03		F	F	11111111	
4	04		F	F	11111111	
5	05		F	F	11111111	
6	06		F	F	11111111	
7	07		0	0	00000000	
8	08	EISA manufacturer code = LGP	3	0	00110000	**Vender/ Product ID**
9	09		F	0	11110000	
10	0A	Product code	1	C	00011100	
11	0B	(Hex, LSB first)	9	C	10011100	
12	0C	32-bit serial number =Don't care	0	0	00000000	
13	0D		0	0	00000000	
14	0E		0	0	00000000	
15	0F		0	0	00000000	
16	10	Week of manufacture = Don't care	0	0	00000000	
17	11	Year of manufacture = 2002	0	C	00001100	
18	12	EDID Structure version # = 1	0	1	00000001	**EDID Version /Revision**
19	13	EDID Revision # = 3	0	3	00000011	
20	14	Video input definition = Digital I/p,non TMDS CRGB	8	0	10000000	**Display Parameter**
21	15	Max H image size(cm)= 28.5696cm	1	C	00011100	
22	16	Max V image size(cm)= 21.4272cm	1	5	00010101	
23	17	Display gamma = 2.2	7	8	01111000	
24	18	Feature support(DPMS) = Active off, RGB Color	0	A	00001010	
25	19	Red/Green low Bits	D	B	11011011	**Color Characteristic**
26	1A	Blue/White Low Bits	3	2	00110010	
27	1B	Red X Rx =0.569	9	1	10010001	
28	1C	Red Y Ry =0.333	5	5	01010101	
29	1D	Green X Gx =0.314	5	0	01010000	
30	1E	Green Y Gy =0.534	8	8	10001000	
31	1F	Blue X Bx =0.156	2	8	00101000	
32	20	Blue Y By =0.136	2	2	00100010	
33	21	White X Wx = 0.320	5	2	01010010	
34	22	White Y Wy = 0.330	5	4	01010100	
35	23	Established Timing I	0	0	00000000	**Established Timings**
36	24	Established Timing II	0	8	00001000	
37	25	Manufacturer's Timings	0	0	00000000	
38	26	Standard Timing Identification 1 was not used	0	1	00000001	**Standard Timing ID**
39	27	Standard Timing Identification 1 was not used	0	1	00000001	
40	28	Standard Timing Identification 2 was not used	0	1	00000001	
41	29	Standard Timing Identification 2 was not used	0	1	00000001	
42	2A	Standard Timing Identification 3 was not used	0	1	00000001	
43	2B	Standard Timing Identification 3 was not used	0	1	00000001	
44	2C	Standard Timing Identification 4 was not used	0	1	00000001	
45	2D	Standard Timing Identification 4 was not used	0	1	00000001	
46	2E	Standard Timing Identification 5 was not used	0	1	00000001	
47	2F	Standard Timing Identification 5 was not used	0	1	00000001	
48	30	Standard Timing Identification 6 was not used	0	1	00000001	

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3

Byte# DEC	Byte# HEX	Field Name and Comments	Value HEX		Value BIN	
49	31	Standard Timing Identification 6 was not used	0	1	00000001	
50	32	Standard Timing Identification 7 was not used	0	1	00000001	
51	33	Standard Timing Identification 7 was not used	0	1	00000001	**Standard Timing ID**
52	34	Standard Timing Identification 8 was not used	0	1	00000001	
53	35	Standard Timing Identification 8 was not used	0	1	00000001	
54	36	Detailed Timing Descriptor #1	6	4	01100100	
55	37	1024 x768@60㎐ mode : pixel clock = 65㎒	1	9	00011001	
56	38	Horizontal Active = 1024 pixels	0	0	00000000	
57	39	Horizontal Blanking = 320 pixels	4	0	01000000	
58	3A	Horizontal Active : Horizontal Blanking	4	1	01000001	
59	3B	Vertical Avtive = 768 lines	0	0	00000000	
60	3C	Vertical Blanking = 38 lines	2	6	00100110	
61	3D	Vertical Active : Vertical Blanking	3	0	00110000	
62	3E	Horizontal Sync. Offset = 24 pixels	1	8	00011000	**Detailed Timing Description #1**
63	3F	Horizontal Sync Pulse Width = 136 pixels	8	8	10001000	
64	40	Vertical Sync Offset = 3 lines,Sync Width = 6 lines	3	6	00110110	
65	41	Horizontal Vertical Sync Offset/Width upper 2bits =0	0	0	00000000	
66	42	Horizontal Image Size = 285.696㎜	1	D	00011101	
67	43	Vertical Image Size = 214.272㎜	D	6	11010110	
68	44	Horizontal & Vertical Image Size	1	0	00010000	
69	45	Horizontal Border = 0	0	0	00000000	
70	46	Vertical Border = 0	0	0	00000000	
71	47	Non-interlaced, Normal display ,no stereo, Digital separate sync	1	8	00011000	
72	48	Detailed Timing Descriptor #2	0	0	00000000	
73	49		0	0	00000000	
74	4A		0	0	00000000	
75	4B	ASCII string	F	E	11111110	
76	4C		0	0	00000000	
77	4D	L	4	C	01001100	
78	4E	P	5	0	01010000	
79	4F	1	3	1	00110001	**Detailed Timing Description #2 ASCII string : LP141X13**
80	50	4	3	4	00110100	
81	51	1	3	1	00110001	
82	52	X	5	8	01011000	
83	53	1	3	1	00110001	
84	55	3	3	3	00110011	
85	55	New line character : indicates end of ASCII string	0	A	00001010	
86	56	Space	2	0	00010000	
87	57	Space	2	0	00010000	
88	58	Space	2	0	00010000	
89	59	Space	2	0	00010000	
90	5A	Detailed Timing Descriptor #3	0	0	00000000	
91	5B		0	0	00000000	
92	5C		0	0	00000000	**Detailed Timing Description #3 ASCII string : LP141X13**
93	5D	ASCII string	F	E	11111110	
94	5E		0	0	00000000	
95	5F	L	4	C	01001100	
96	60	P	5	0	01010000	
97	61	1	3	1	00110001	

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3

Byte# DEC	Byte# HEX	Field Name and Comments	Value HEX		Value BIN	
98	62	4	3	4	00110100	**Detailed Timing Description #3**
99	63	1	3	1	00110001	
100	64	X	5	8	01011000	
101	65	1	3	1	00110001	
102	66	3	3	3	00110011	
103	67	New line character : indicates end of ASCII string	0	A	00001010	
104	68	Space	2	0	00010000	
105	69	Space	2	0	00010000	
106	6A	Space	2	0	00010000	
107	6B	Space	2	0	00010000	
108	6C	Detailed Timing Descriptor #4	0	0	00000000	**Detailed Timing Description #4 Monitor Name : Color LCD**
109	6D		0	0	00000000	
110	6E		0	0	00000000	
111	6F	Monitor Name	F	C	11111100	
112	70		0	0	00000000	
113	71	C	4	3	01000011	
114	72	o	6	F	01101111	
115	73	l	6	C	01101100	
116	74	o	6	F	01101111	
117	75	r	7	2	01110010	
118	76	Space	2	0	00010000	
119	77	L	4	C	01001100	
120	78	C	4	3	01000011	
121	79	D	4	4	01000100	
122	7A	New line character : indicates end of ASCII string	0	A	00001010	
123	7B	Space	2	0	00010000	
124	7C	Space	2	0	00010000	
125	7D		0	0	00000000	
126	7E	Extension flag = 00	0	0	00000000	**Extension Flag**
127	7F	Checksum	8	F	10001111	**Checksum**